



## Fuse Strips with Housing Rated 48V - SPECIAL PURPOSE FUSES (NOT INTENDED FOR AUTOMOTIVE OR TRUCK APPLICATIONS)

Housed fuse strips for battery-powered vehicles. Current rating 35A - 500A, 48 VDC. 90° and straight fork type lugs. With window for visual inspection of melting element.


### Specifications

|                              |  |
|------------------------------|--|
| Voltage Rating:              | 48 VDC   |
| Interrupt Ratings:           | up to 3000A  |
| Operating Temperature Range: | -40° to 125°C  |
| Metal Parts:                 | 35A - 80A: Zinc-alloy<br>100A - 500A: Copper Cu, gal. Sn |
| Complies with:               | UL 248 Special Purpose Fuses                             |
| cULus Recognized:            | File No. E211637   |




### Dimensions

Dimensions in mm

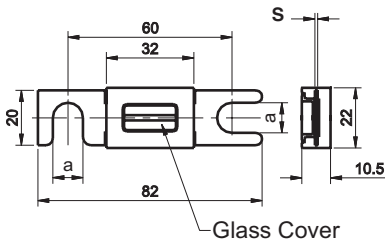

### Pre-Arcing Time-Limits

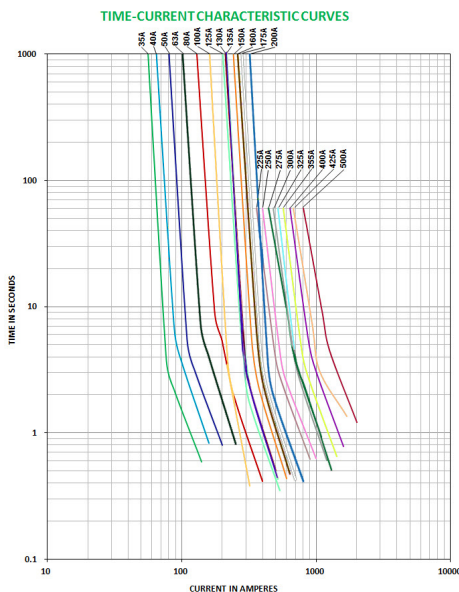

FI = 1.00 (max. operating current:  $1.0 \times I_{rat}$  at 23°C)

### Ordering Information

| Part Number   | Package Size |
|---------------|--------------|
| 157.5701.xxx1 | 50           |
| 157.5917.xxx1 | 50           |

### Time-Current Characteristics

| % of Rating | Opening Time Min / Max (s) |           |
|-------------|----------------------------|-----------|
|             | 35-200                     | 225 - 500 |
| 150         | 3,600 s / -                | - / -     |
| 160         | - / -                      | 60 s / -  |
| 220         | - / 60 s                   |           |
| 250         | 0.8 s / 10 s               |           |
| 400         | 0.20 / 2 s                 |           |

### Ratings

| Part Number   |               | Current Rating (A) | Typ. Voltage Drop (mV) | Breaking Capacity (VDC/A) | Material Thickness "S" (mm) |
|---------------|---------------|--------------------|------------------------|---------------------------|-----------------------------|
| a = 11 mm     | a = 9 mm*     |                    |                        |                           |                             |
| 157.5701.5351 | 157.5917.5351 | 35                 | 125                    | 48/210                    | 0.6                         |
| 157.5701.5401 | -             | 40                 | 125                    | 48/240                    | 0.6                         |
| 157.5701.5501 | 157.5917.5501 | 50                 | 125                    | 48/300                    | 0.6                         |
| 157.5701.5631 | 157.5917.5631 | 63                 | 125                    | 48/378                    | 0.6                         |
| 157.5701.5801 | 157.5917.5801 | 80                 | 125                    | 48/480                    | 0.6                         |
| 157.5701.6101 | 157.5917.6101 | 100                | 125                    | 48/600                    | 0.5                         |
| 157.5701.6121 | 157.5917.6121 | 125                | 125                    | 48/750                    | 0.8                         |
| 157.5701.6131 | -             | 130                | 125                    | 48/780                    | 0.8                         |
| 157.5701.6141 | -             | 135                | 125                    | 48/810                    | 0.8                         |
| 157.5701.6151 | 157.5917.6151 | 150                | 125                    | 48/900                    | 0.8                         |
| 157.5701.6161 | 157.5917.6161 | 160                | 125                    | 48/960                    | 1.0                         |
| 157.5701.6171 | 157.5917.6171 | 175                | 125                    | 48/1050                   | 1.0                         |
| 157.5701.6201 | 157.5917.6201 | 200                | 125                    | 48/1200                   | 0.8                         |
| 157.5701.6231 | 157.5917.6231 | 225                | 125                    | 48/1350                   | 0.5                         |
| 157.5701.6251 | 157.5917.6251 | 250                | 125                    | 48/1500                   | 0.5                         |
| 157.5701.6271 | 157.5917.6281 | 275                | 125                    | 48/1650                   | 0.8                         |
| 157.5701.6301 | -             | 300                | 125                    | 48/1800                   | 0.8                         |
| 157.5701.6331 | 157.5917.6331 | 325                | 125                    | 48/1950                   | 0.8                         |
| 157.5701.6351 | 157.5917.6351 | 355                | 125                    | 48/2130                   | 0.8                         |
| 157.5701.6401 | -             | 400                | 125                    | 48/2400                   | 0.8                         |
| 157.5701.6421 | 157.5917.6421 | 425                | 125                    | 48/2550                   | 1.0                         |
| 157.5701.6501 | 157.5917.6501 | 500                | 125                    | 48/3000                   | 1.0                         |

Corresponding holder see Section "Fuse Holders."

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.