


② Number of poles	Nx5.0	<N-1>X5.0
2~6P	±0.15	±0.10
7~12P	±0.20	±0.20
13~18P	±0.30	±0.25
19~24P	±0.40	±0.30

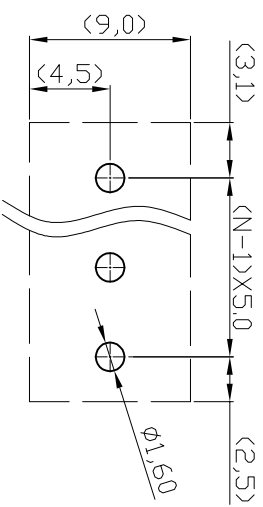

- Material**
- Terminal body (metal housing): Brass(CuZn)
 - Terminal screw: Steel Zinc plating"-slot type
 - Contacts: Brass
 - Surface of solder tail: Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0), Green
- Electrical**
- Voltage rating: cULus/ FIMKO 300VAC/300VAC
 - Current rating: 16A /17.5A
 - Wire range: 0.5-1.5mm
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
 - Torque: 3.5 Lb-In/ 0.4N.m
 - Screw:M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV / 2.5KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: cULus Ⓢ

RoHS compliant

Unit:mm

Scale	1:1								
TOLERANCE									
X.	±0.50								
X.X	±0.30								
X.XX	±0.10								
DIM	TOL								
X.°	±1°	②	Add the tolerance table	06.05.2014	Winnie				
X.X°	±X°	①	Drawn	27.05.2009	Dean				
Angle	TOL	Id.	Modification	Date	Name	Date	Name	Date	Name



Customer-No. ASSMANN WSW-No. **A-TB500-V1XXH**

Drawing-No. **ASS 3525 CO**

Replace Sheet

1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B
H	G	F	E	D	C	B
SV1501 SV3568						