

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

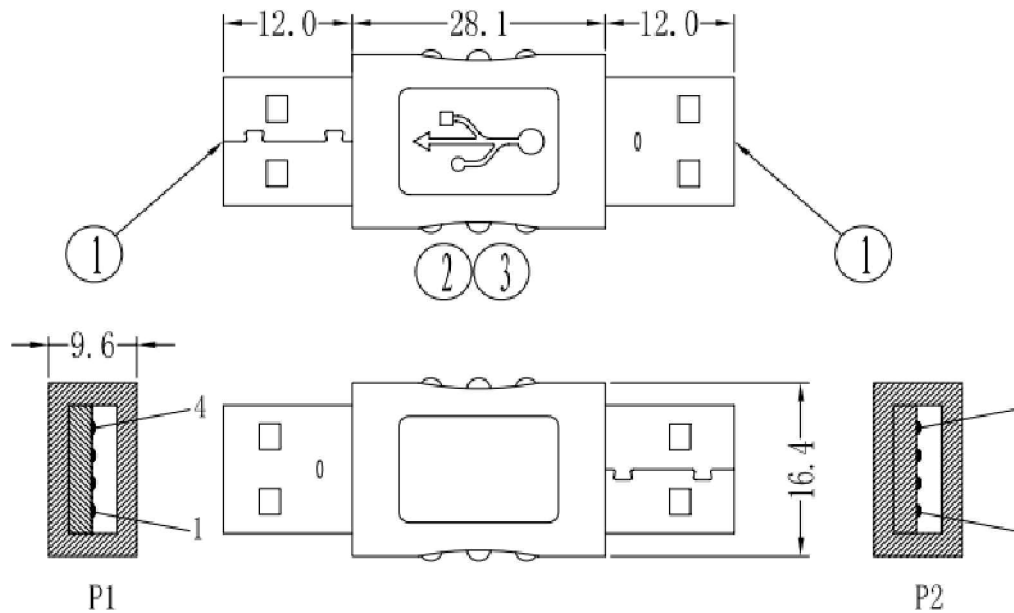

### Electronic test:

- 1.100% test(open,short,miss wire)
- 2.contact resistance:3 ohm max.
- 3.insulation resistance:5M ohm min.
- 4.Hi-pot: 300V DC/10ms

### PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
S	S

3	out jacket	BEIGE(IV-29) 45P PVC	6g
2	cable	UL1007 28AWG L=30MM	3
1	conn	USB A MALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY INSULATOR COLOR:WHITE	2
NO	PART NO	DESCRIPTION	QTY

**RoHS compliant**  
Unit:: mm

Scale	FREE	Date	10.07.2015	Name	Joanna	Customer-No.	
TOLERANCE		Drawn	10.07.2015	Approved	10.07.2015	ASSMANN WSW-No.	A-USB-5
X.	±X					Drawing-No.	ASS 7432 CA
X.X	±X						rev00
X.XX	±X					Replace	Sheet
DIM	TOL						
ANGLE	±X°						
		© Drawn	10.07.2015	Joanna			
Angle	TOL	Id.	Modification	Date	Name		

**ASSMANN**  
WSW components

1

2

3

4

5

6

7