THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ±.03 [0,8]	W ±.01 [0,3]	C ±.02 [0,5]	M ±.03 [0,8]	H ±.01 [0,3]
E14-6FB	#6	M3	.63 [16,00]	.28 [7,11]	.20 [5,08]	.49 [12,45]	.15 [3,81]
E14-8FB	#8	M4	.69 [17,53]	.31 [7,87]	.23 [5,84]	.53 [13,46]	.17 [4,32]
E14-10FB	#10	M5	.71 [18,03]	.34 [8,64]	.25 [6,35]	.55 [13,97]	.20 [5,08]

UL & CSA TOOLS
CT-100A CT-200 CT-600-A (CT-570CH) CT-1570 CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS
CT-160 CT-260

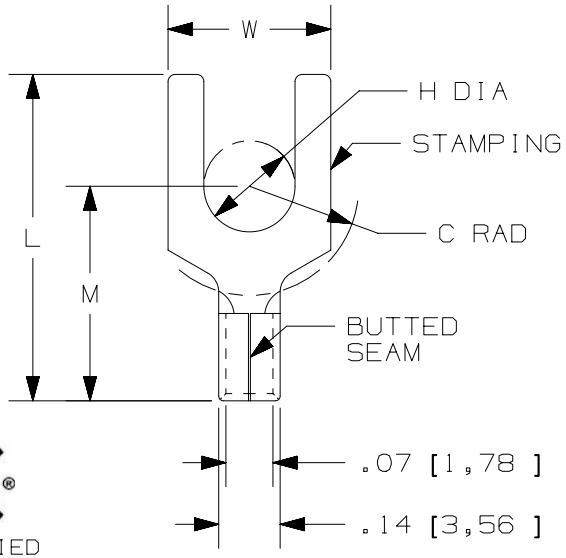

NOTES:

1. UL LISTED & CSA CERTIFIED FOR:
   A. #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
   B. 302°F [150°C] MAX OPERATING TEMPERATURE
   C. 2000 VOLTS MAX
2. MATERIAL:
   A. STAMPING: .032" [0,8] THK COPPER, TIN PLATED
3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]
4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

c UL us LISTED 587H E52164

CSA CERTIFIED LR31212

TITLE

STRONGHOLD FORK TERMINAL
NON-INSULATED, BUTTED SEAM #16-14 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHL/00

DATASET FILE NAME: 00123SHL_DC/00

PANDUIT™

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±
.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41255

DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE
JHNU	2/18	TMR	NTS		A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/12